

1. TOUCH PANEL PIN ASSIGNMENT

PIN NO.	Designation
1	RT
2	LT
3	S
4	LB
5	RB

2. MATERIAL CHARACTERISTICS

Property	Requirement
Surface treatment	Anti-Glare
Bottom glass thickness	1.8mm
Light transmission	78%
Operation temperature	-30~70°C
Storage temperature	-30~80°C
Operating Humidity	20~90%RH
Storage Humidity	20~90%RH
Surface hardness	≥ 3H

3.K.A.:KEY AREA




4.A.A.:ACTIVE AREA

5.V.A.:VIEW AREA

6.D.O.:DIMENSIONAL OUTLINE

7.Tolerance no specified: $\pm 0.5\text{mm}$

8. Mark "Q" - part of measurement

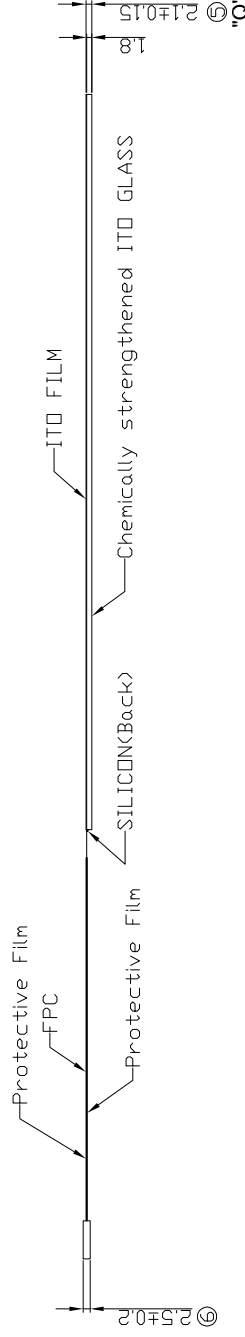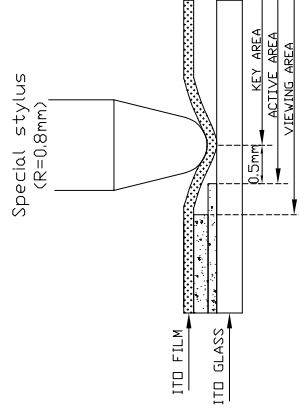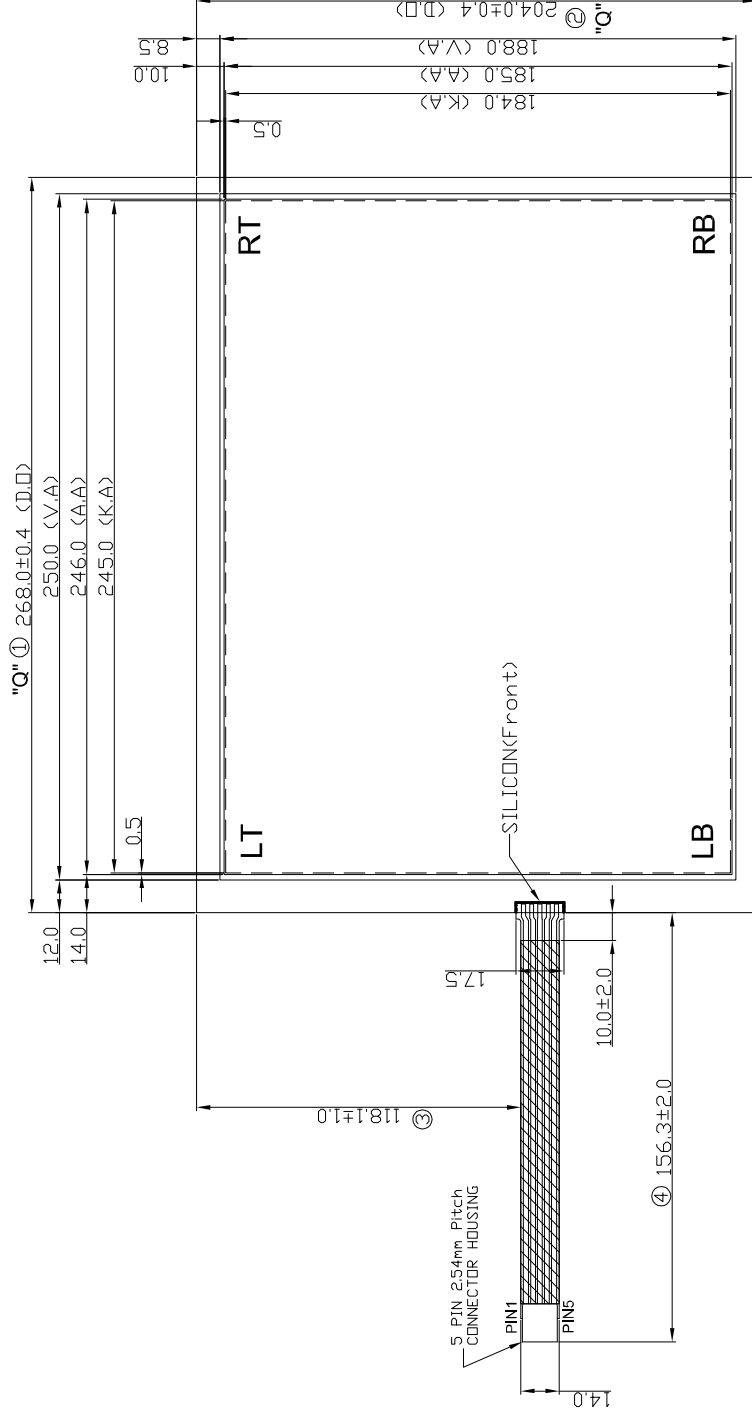

SYMBOL	DATE	REVISED DESCRIPTIONS
D16.1	2014.10.03	Modify film material

[illegible]

榮茂光學股份有限公司 MILDEX OPTICAL INC.			DWG-NO	M121505-D16-1
APPROVED	CHECK	DRAWN		
林佳宏	李軒漢		SCALE	---
			UNIT	mm
			DATE	2014.10.03
			SHEET NO.	1 / 1

DWG-NO	M121505-D16.1
	
SCALE	1:1
UNIT	mm
DATE	2014.10.03
SHEET NO.	1/1