



EG2-0500 Series


5-Port Industrial Gigabit Ethernet Switch
- 5*10/100/1000Tx, 12-48VDC Power Input



- 5-port 10/100/1000Tx Gigabit Ethernet
- Redundant Power Input Design, 12-48VDC
- Built-in Relay Output Warning for Power Failure
- IP30 Rugged Metal Case Design
- DIN-Rail Mounting, Wall Mounting
- Operating Temperature Range - STD: -10°C ~ 65°C, EOT: -40°C ~ 75°C



Dimension

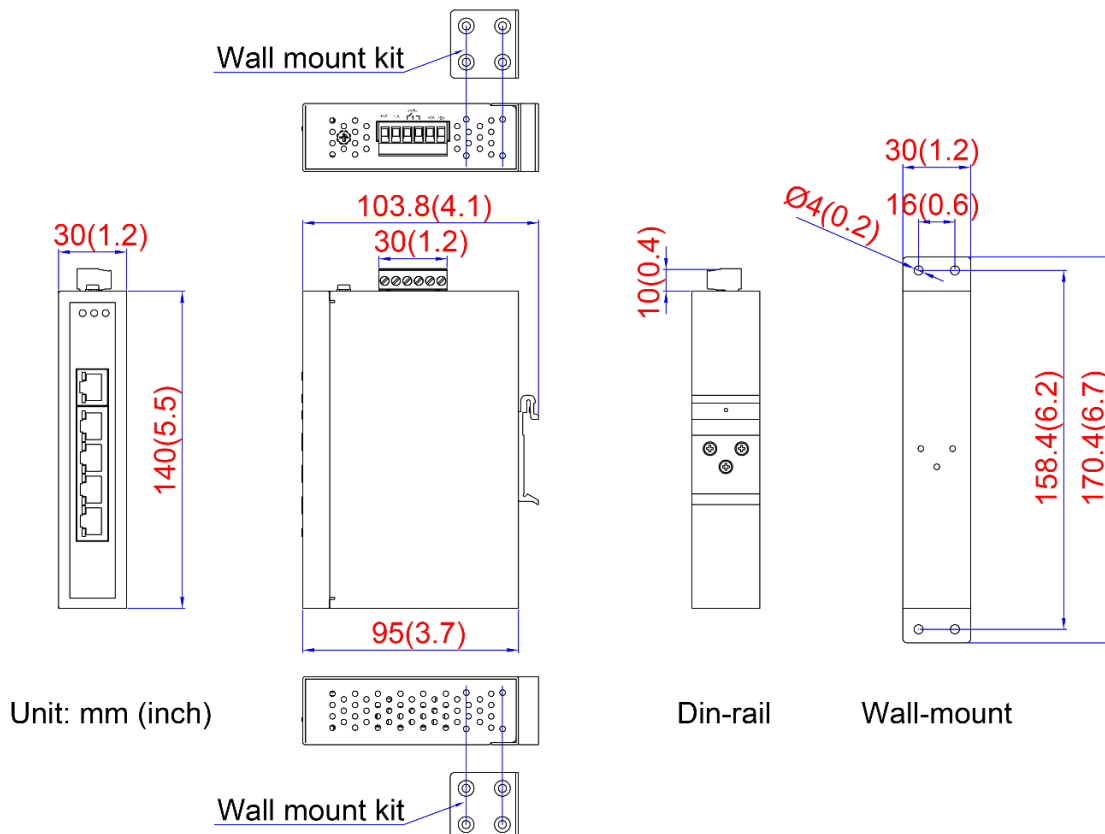

Specification

Technology	
Standards	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX Fast Ethernet IEEE 802.3ab 1000BaseT Gigabit Ethernet
Processing Type	Store and Forward
Protocol	CSMA/CD
Flow Control	IEEE 802.3x flow control, back pressure flow control
Switch Properties	
Switching Fabric (Back-Plane)	10Gbps
Memory Buffer	1Mbits
MAC Table Size	8K
Jumbo Frame	10Kbytes
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port 1,488,000pps for Gigabit Ethernet Port
Interface	
RJ45 Ports	5*10/100/1000 Base-T(X) Auto-Negotiation, Full/Half Duplex, Auto-MDI/MDI-X
LED Indicators	System: Power 1, Power 2, Fault Ethernet ports: On-Link/Flash-data transmitting
Relay Contact	24 VDC, 1A resistive
Network Cable	10BaseT: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BaseTX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
Power Requirements	
Input Voltage	Dual 12-48VDC redundant power inputs
Power Connection	1*removable 6-contact terminal block
Overload Current Protection	Present (Slow-Blow Fuse)
Reverse Polarity Protection	Present
System Power Consumption	Max. 6.6W full loading
Mechanical Characteristics	
Housing	Metal, IP30 protection
Dimensions (W x H x D)	30 x 140 x 95 mm (1.2 x 5.5 x 3.7 inch)
Weight	Unit weight: 0.45kg (0.99lbs.), Shipping weight: 0.65kg (1.43lbs.)
Mounting	DIN-Rail Mounting, Wall Mounting
Environmental Limits	
Operating Temperature	STD: -10°C ~ 65°C (14°F ~ 149°F) EOT: -40°C ~ 75°C (-40°F ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
EMS	CE EN55035/EN61000-6-2: IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Safety	UL61010-1, UL61010-2-201, ISA 12.12.01
Corrosion Protection	IEC 60068-2-11, IEC 60068-2-52, IEC 60068-2-60

	IPC-CC-830B, MIL-I-46058C, IEC 61086-2 (Class 2), UL 94, UL 746E ISO 9223 (Class C5-Very High, Class CX-Extreme) ANSI/ISA 71.04 (Class GX-Severe)
Compliance	NEMA TS2 (ITS)– EoT version
MTBF (Telcordia SR-332, Issue 3, GB, 25°C)	3,049,321 hrs.
Warranty	5 Years
NOTE: Due to continuous improvement, all product specifications are subject to change without further notice.	

Packet Contents	pcs
EG2-0500(-T) Ethernet switch	1
Wall-mount installation kits	2
Quick installation guide (printed)	1

Comparison Table					
Model Name	10/100/1000 T(X)	100/1000 (F)X SFP	Power Inputs	PoE Max. Power Budget	Operating Temperature
EG2-0500	5	-	12-48VDC	-	-10°C ~ 65°C
EG2-0500-T	5	-	12-48VDC	-	-40°C ~ 75°C
EG2-0500 Corrosion Protection Version	5	-	12-48VDC	-	-10°C ~ 65°C
EG2-0500-T Corrosion Protection Version	5	-	12-48VDC	-	-40°C ~ 75°C

Ordering Information	
EG2-0500	5-Port Industrial Gigabit Ethernet Switch - 5*10/100/1000Tx, 12-48VDC, -10°C ~ 65°C
EG2-0500 -T	5-Port Industrial Gigabit Ethernet Switch - 5*10/100/1000Tx, 12-48VDC, -40°C ~ 75°C
EG2-0500 Corrosion Protection Version	5-Port Industrial Gigabit Ethernet Switch - 5*10/100/1000Tx, 12-48VDC, -10°C ~ 65°C
EG2-0500-T Corrosion Protection Version	5-Port Industrial Gigabit Ethernet Switch - 5*10/100/1000Tx, 12-48VDC, -40°C ~ 75°C

Optional Accessories - Power Supply Series	
30W Power Supply Series	
HDR-30-24	36W Industrial DIN-Rail Power Supply, 24VDC/1.5A, Universal 85-264VAC/120-370VDC power input, Plastic, -30°C ~ 70°C
60W Power Supply Series	
HDR-60-24	60W Industrial DIN-Rail Power Supply, 24VDC/2.5A, Universal 88-264VAC/124-370VDC power input, Plastic, -30°C ~ 70°C
MDR-60-24	60W Industrial DIN-Rail Power Supply, 24VDC/2.5A, Universal 85-264VAC/120-370VDC power input, Plastic, -20°C ~ 70°C
75W Power Supply Series	
EDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C
NDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
120W Power Supply Series	
EDR-120-48	120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C

NDR-120-24	120W Industrial DIN-Rail Power Supply, 24VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
NDR-120-48	120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
240W Power Supply Series	
NDR-240-48	240W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
SDR-240-24	240W Industrial DIN-Rail Power Supply w/ PFC, 24VDC/10A, Universal 88-264VAC/124-370VDC power input, Metal, -25°C ~ 70°C
480W Power Supply Series	
NDR-480-48	480W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/10A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C