

PG5-1002-SFP Series

10-Port Industrial Gigabit PoE+ Managed Ethernet Switch

- 8*10/100/1000Base-T(X) with PoE-PSE (30W/Port) + 2*100/1000Base-(F)X SFP Slots

Feature



Managed



Gigabit



PoE



Corrosion Protection



- 8-port 10/100/1000Base-T(X) Ethernet with IEEE 802.3af/at compliant PoE, 30W/port
- 2-port dual rate 100/1000Base-(F)X SFP slots
- Multiusers account for security
- Configuration: http, https, CLI Command, Telnet, SNMP, SSH
- Network redundancy support: G.8032 ERPS v2/STP/RSTP/MSTP
- Supports IP route for routing function
- Supports RADIUS, TACACS+ authentication protocol
- Supports QoS, LACP bandwidth control
- Supports VLAN, SNMP v1/v2c/v3, ACL, IP source guard for Ethernet security
- PoE ping alarm function for PoE ports power recycle
- Redundant power inputs design
- Operating temperature range - STD: -10°C ~ 65°C, EOT: -40°C ~ 75°C




Introduction

Leonton's PG5-1002-SFP Series are 10-port full gigabit managed PoE Ethernet switch, which provides 8*10/100/1000 Base-T(X) with IEEE 802.3 af/at PoE compliant and 2*100/1000 Base-(F)X SFP slots. PG5-1002-SFP Series are full manageable Layer-2 Ethernet switch series, and supporting power inputs redundancy and PoE function with 30W per port output. PG5-1002-SFP Series offers standardized network redundancy ITU-T G.8032 ERPS v2 (Ethernet Ring Protection Switch) protocol, providing <50ms recovery time to the network, to give user the chance to choose your Ethernet switch but not tied up with particular brand's product.

PG5-1002-SFP Series provides comprehensive network security and management capability by supporting Multiusers account, IGMP, GVRP, VLAN, QoS, SNMP, RADIUS, TACACS+, Aggregation(Static, LACP), SSH, SSL, IP source guard to create a highly-secured network environment. Besides, supporting PoE ping alarm function allows user to reboot the powered device remotely when it suffered a malfunction. For power saving purpose, assuring PD priority and enhancing security level of the network, PG5-1002-SFP Series also supports PoE scheduling and PoE output limit function to set up PoE output duration and watt at will.

PG5-1002-SFP Series as an industrial Ethernet switch product line, is designed to withstand harsh and extreme environment conditions. With fan less design, PG5-1002-SFP still manage to be applied in extremely polarized temperature, from -40°C to 75°C, making it the best choice in various industrial applications.

Dimensions (unit = mm)

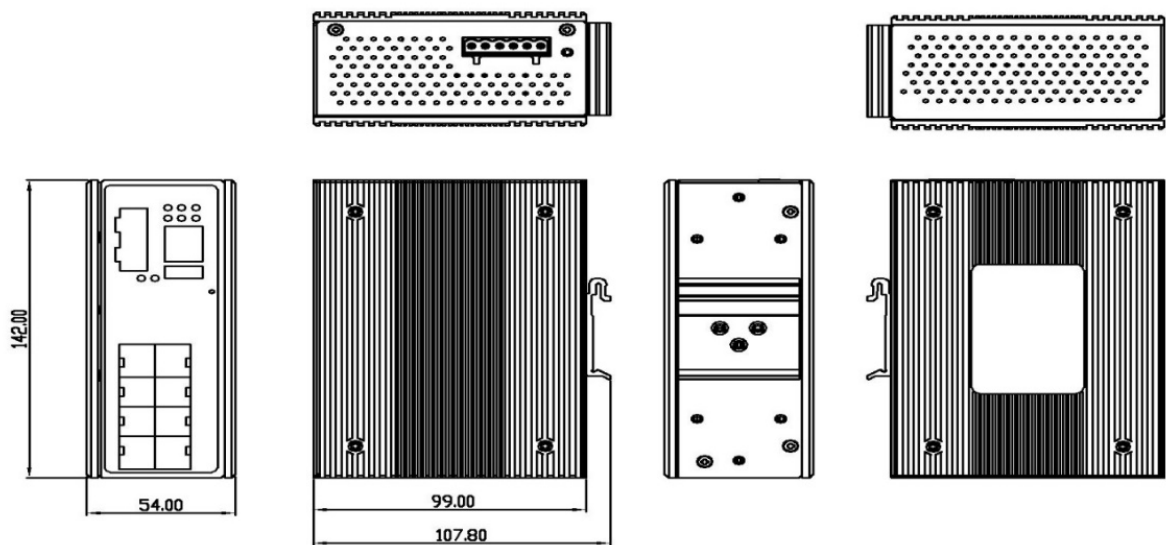

Specifications	
Technology	
Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX and 100Base-FX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3z 1000Base-X Gigabit Fiber IEEE 802.3af/at Power over Ethernet IEEE 802.3x Flow Control IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032 / Y.1344 ERPS v1/v2(Ethernet Ring Protection Switch)

	IEEE 802.1Q Virtual Local Area Network (VLAN) IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization IEEE 802.1X Network Authentication IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.3ad Link Aggregation (LACP)
Processing Type	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Network Management	
Management	IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 telnet, DHCP client, DHCPv6 client, DHCP server, Port Mirror, DNS client/proxy, IP based Access Filter, ICMPv6, syslog, Time Zone /Daylight Saving, NTP client, RMON, sFlow, Loop detection, Console Port, Power lost warning, relay trigger
Security	Port-based/Single/Multi 802.1X, ACL(Port/Rate Limiters/ACE), MAC-based Authentication, VLAN assignment, QoS Assignment, Private VLAN, Guest VLAN, RADIUS accounting, TACACS+, IP MAC binding, WEB/CLI authentication, Authorization (15 levels), Port Security Limit Control, ACLs for filtering/policing/port copy, IP source guard, ARP Inspection
L2 Switching	Port/MAC/Protocol/IP Subnet-based VLAN, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMP snooping v2/v3, MLD snooping v1/v2, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, G.8032 v1/v2
L3 Switching	DHCP option82, IP route
QoS	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode
Power Saving	ActiPHY, PerfectReach, IEEE 802.3az EEE power management
Network Redundancy	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2(<50ms)
Configuration	Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3
PoE	POE/POE+ port power allocation, Power budget protection, PoE output scheduled, PoE alive check and remote reboot PD device
System / Diagnostics	Dual Image Protection, PING, PING6
SNMP MIBs & RFC Standards	RFC 2674 VLAN MIB IEEE-802.1Q bridge MIB 2008 RFC 2819 RMON (group 1, 2, 3, and 9) RFC 1213 MIB II RFC 1215 TRAPS RFC 4188 bridge RFC 4292 IP forwarding table RFC 4293 management information base for the Internet Protocol (IP) RFC 5519 multicast group membership discovery RFC 4668 RADIUS auth. client RFC 4670 RADIUS accounting RFC 3635 Ethernet-like RFC 2863 interface group MIB using SMI v2 RFC 3636 802.3 MAU RFC 4133 entity MIB v3

	RFC 3411 SNMP management frameworks RFC 3414 user-based security model for SNMPv3 RFC 3415 view-based access control model for SNMP RFC 2613 SMON – PortCopy IEEE 802.1 MSTP IEEE 802.1AB LLDP-MIB (LLDP MIB included in a clause of the STD) IEEE 802.3ad (LACP MIB included in a clause of the STD) IEEE 802.1X (PAE MIB included in a clause of the STD) TIA 1057 LLDP-MED (MIB is part of the STD) RFC 3621 LLDP-MED Power (POE) (No specific MIB for POE+ exists)
Switch Properties	
Back-Plane (Switching Fabric)	20Gbps
Priority Queues	8
Max. Number of VLANs	4095
VLAN ID Range	VID 1 to 4095
Memory Buffer	4Mbits
Jumbo Frame	9.6Kbytes
MAC Table Size	8K
IGMP Group	1024
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Ethernet port
Interface	
RJ45 Ports	8*10/100/1000Base-T(X) with PoE+, auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
PoE Pin Out	V+, V+, V-, V-, for pin 1, 2, 3, 6 (End-span, Mode A)
Fiber Port	2*100/1000Base-(F)X SFP slots
Wavelength	Depends on SFP modules
LED Indicators	System: Power 1, Power 2, Master, Ring, Fault Ethernet ports: Speed/Link/Active PoE: On-connected to PD devices SFP: Link/Active
RS232 Serial Console	1*RS232 in RJ45 connector with console cable, baud rate 115,200bps,8,N,1
Relay Contact	24 VDC, 1A resistive
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000Base-T: 4-pair UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
Optical Cable	Multi-mode cable - 50/125um or 62.5/125um, Single-mode cable - 9/125um or 10/125um
Power Requirements	
Input Voltage	PG5-1002-SFP(-T): dual 48-55VDC redundant power inputs
	PG5-1002-SFP-24(-T): dual 12-55VDC redundant power inputs
Power Connection	1 removable 6-contact terminal block
Overload Current Protection	Present (Slow-Blow Fuse)
Reverse Polarity Protection	Present

System Power Consumption	Max. 15W full loading
Max. PoE Power Budget	PG5-1002-SFP(-T): 240W@48-55VDC
	PG5-1002-SFP-24(-T): 90W@12VDC, 180W@24VDC, 240W@48-55VDC
PoE Power Output	30W max. per PoE port
Mechanical Characteristics	
Housing	Metal, IP30 protection
Dimensions (W x H x D)	54 x 142 x 99 mm (2.13 x 5.59 x 3.9 inch)
Weight	PG5-1002-SFP(-T): Unit weight: 0.89kg (1.97 lb), Shipping weight: 1.25kg (2.76 lb)
	PG5-1002-SFP-24(-T): Unit weight: 0.94kg (2.07 lb), Shipping weight: 1.3kg (2.87 lb)
Mounting	DIN-Rail Mounting, Wall Mounting
Environmental Limits	
Operating Temperature	STD: -10°C ~ 65°C (14°C ~ 149°F) EOT: -40°C ~ 75°C (-40°C ~ 167°F)
Storage Temperature	-40°C ~ 85°C (-40°C ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Part 15 Subpart B Class A, CE EN55022/EN61000-6-4 Class A
EMS	CE EN55024/EN61000-6-2 Class A: IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Safety	UL61010-1, UL61010-2-201, ISA 12.12.01 C1D2, ATEX Zone 2 Ex nA nC IIC T4 GC
Corrosion Protection	NOTE. For PG5-1002-SFP(-T) series only IEC 60068-2-11, IEC 60068-2-52, IEC 60068-2-60 IPC-CC-830B, MIL-I-46058C, IEC 61086-2 (Class 2), UL 94, UL 746E ISO 9223 (Class C5-Very High, Class CX-Extreme) ANSI/ISA 71.04 (Class GX-Severe)
Compliance	NEMA TS2 (ITS)–EoT version (PG5-1002-SFP-24(-T) Series only)
MTBF (Telcordia SR-332, Issue 3, GB, 25°C)	PG5-1002-SFP: 456,578 hrs.
	PG5-1002-SFP-24: 442,020 hrs.
Warranty	5 Years
NOTE: Due to continuous improvement, all product specifications are subject to change without further notice.	

Packet Contents

- 1 PG5-1002-SFP(-24)(-T) Ethernet switch
- 1 RJ45 (Male) to DB-9 RS-232 (Female) serial console cable
- 2 Wall-mount installation kits
- 1 Quick installation guide (printed)

Comparison Table					
Model Name	10/100/1000 Base-T(X) PoE+	100/1000B ase-(F)X SFP	Power Inputs	PoE Max. Power Budget	Operating Temperature
PG5-1002-SFP	8	2	48-55VDC	240W	-10°C ~ 65°C
PG5-1002-SFP-T	8	2	48-55VDC	240W	-40°C ~ 75°C
PG5-1002-SFP-24	8	2	12-55VDC	90W@12VDC 180W@24VDC 240W@48-55VDC	-10°C ~ 65°C
PG5-1002-SFP-24-T	8	2	12-55VDC	90W@12VDC 180W@24VDC 240W@48-55VDC	-40°C ~ 75°C

Ordering Information

PG5-1002-SFP	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch - 8*10/100/1000Base-T(X) with PoE Injector (30W/Port) + 2*100/1000Base-(F)X SFP Slot, Standard Operating Temperature: -10° to 65° C
PG5-1002-SFP-T	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch - 8*10/100/1000Base-T(X) with PoE Injector (30W/Port) + 2*100/1000Base-(F)X SFP Slot, Extended Operating Temperature: -40° to 75° C
PG5-1002-SFP-24	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch - 8*10/100/1000Base-T(X) with PoE Injector (30W/Port) + 2*100/1000Base-(F)X SFP Slot, Booster Version, Standard Operating Temperature: -10° to 65° C
PG5-1002-SFP-24-T	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch - 8*10/100/1000Base-T(X) with PoE Injector (30W/Port) + 2*100/1000Base-(F)X SFP Slot, Booster Version, Extended Operating Temperature: -40° to 75° C
PG5-1002-SFP Corrosion Protection Version	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch - 8*10/100/1000Base-T(X) with PoE Injector (30W/Port) + 2*100/1000Base-(F)X SFP Slot, Standard Operating Temperature: -10° to 65° C
PG5-1002-SFP-T Corrosion Protection Version	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch - 8*10/100/1000Base-T(X) with PoE Injector (30W/Port) + 2*100/1000Base-(F)X SFP Slot, Extended Operating Temperature: -40° to 75° C
PG5-1002-SFP-24 Corrosion Protection Version	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch - 8*10/100/1000Base-T(X) with PoE Injector (30W/Port) + 2*100/1000Base-(F)X SFP Slot, Booster Version, Standard Operating Temperature: -10° to 65° C
PG5-1002-SFP-24-T Corrosion Protection Version	10-Port Industrial Gigabit PoE+ Managed Ethernet Switch

- 8*10/100/1000Base-T(X) with PoE Injector (30W/Port) + 2*100/1000Base-(F)X SFP Slot, Booster Version, Extended Operating Temperature: -40° to 75° C

Optional Accessories – Power Supply Series

30W Power Supply Series

HDR-30-24	36W Industrial DIN-Rail Power Supply, 24VDC/1.5A, Universal 85-264VAC/120-370VDC power input, Plastic, -30°C ~ 70°C
-----------	---

60W Power Supply Series

HDR-60-24	60W Industrial DIN-Rail Power Supply, 24VDC/2.5A, Universal 88-264VAC/124-370VDC power input, Plastic, -30°C ~ 70°C
-----------	---

MDR-60-24	60W Industrial DIN-Rail Power Supply, 24VDC/2.5A, Universal 85-264VAC/120-370VDC power input, Plastic, -20°C ~ 70°C
-----------	---

75W Power Supply Series

EDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C
-----------	---

NDR-75-48	75W Industrial DIN-Rail Power Supply, 48VDC/1.6A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
-----------	---

120W Power Supply Series

EDR-120-48	120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 60°C
------------	--

NDR-120-24	120W Industrial DIN-Rail Power Supply, 24VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
------------	--

NDR-120-48	120W Industrial DIN-Rail Power Supply, 48VDC/2.5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
------------	--

240W Power Supply Series

NDR-240-48	240W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/5A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
------------	---

SDR-240-24	240W Industrial DIN-Rail Power Supply w/ PFC, 24VDC/10A, Universal 88-264VAC/124-370VDC power input, Metal, -25°C ~ 70°C
------------	--

480W Power Supply Series

NDR-480-48	480W Industrial DIN-Rail Power Supply w/ PFC, 48VDC/10A, Universal 90-264VAC/127-370VDC power input, Metal, -20°C ~ 70°C
------------	--

Optional Accessories – SFP Transceiver Series

100Mbps Multi-mode SFP Transceiver Modules Series

SFP-TM02	100Mbps SFP Transceiver/LC, MMF, 2KM, 1310nm, 0°C ~ 70°C
----------	--

SFP-TM02-T	100Mbps SFP Transceiver/LC, MMF, 2KM, 1310nm, -40°C ~ 85°C
------------	--

100Mbps Single-mode SFP Transceiver Modules Series

SFP-TS20-WA	100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C
-------------	---

SFP-TS20-WA-T	100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1310nm/RX: 1550nm, -40°C ~ 85°C
---------------	---

SFP-TS20-WB	100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C
-------------	---

SFP-TS20-WB-T	100Mbps BiDi SFP Transceiver/LC, SMF, 20KM, TX: 1550nm/RX: 1310nm, -40°C ~ 85°C
---------------	---

SFP-TS30	100Mbps SFP Transceiver/LC, SMF, 30KM, 1310nm, 0°C ~ 70°C
----------	---

SFP-TS30-T	100Mbps SFP Transceiver/LC, SMF, 30KM, 1310nm, -40°C ~ 85°C
------------	---

1Gbps Multi-mode SFP Transceiver Modules Series

SFP-GM00	1Gbps SFP Transceiver/LC, MMF, 550M, 850nm, 0°C ~ 70°C
SFP-GM00-T	1Gbps SFP Transceiver/LC, MMF, 550M, 850nm, -40°C ~ 85°C
SFP-GM02	1Gbps SFP Transceiver/LC, MMF, 2KM, 1310nm, 0°C ~ 70°C
SFP-GM02-T	1Gbps SFP Transceiver/LC, MMF, 2KM, 1310nm, -40°C ~ 85°C

1Gbps Single-mode SFP Transceiver Modules Series

SFP-GS10	1Gbps SFP Transceiver/LC, SMF, 10KM, 1310nm, 0°C ~ 70°C
SFP-GS10-T	1Gbps SFP Transceiver/LC, SMF, 10KM, 1310nm, -40°C ~ 85°C
SFP-GS10-WA	1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C
SFP-GS10-WA-T	1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1310nm/RX: 1550nm, -40°C ~ 85°C
SFP-GS10-WB	1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C
SFP-GS10-WB-T	1Gbps BiDi SFP Transceiver/LC, SMF, 10KM, TX: 1550nm/RX: 1310nm, -40°C ~ 85°C
SFP-GS20	1Gbps SFP Transceiver/LC, SMF, 20KM, 1310nm, 0°C ~ 70°C
SFP-GS20-T	1Gbps SFP Transceiver/LC, SMF, 20KM, 1310nm, -40°C ~ 85°C
SFP-GS40	1Gbps SFP Transceiver/LC, SMF, 40KM, 1310nm, 0°C ~ 70°C
SFP-GS40-T	1Gbps SFP Transceiver/LC, SMF, 40KM, 1310nm, -40°C ~ 85°C
SFP-GS40-WA	1Gbps BiDi SFP Transceiver/LC, SMF, 40KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C
SFP-GS40-WB	1Gbps BiDi SFP Transceiver/LC, SMF, 40KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C
SFP-GS60	1Gbps SFP Transceiver/LC, SMF, 60KM, 1550nm, 0°C ~ 70°C
SFP-GS60-T	1Gbps SFP Transceiver/LC, SMF, 60KM, 1550nm, -40°C ~ 85°C
SFP-GS60-WA	1Gbps BiDi SFP Transceiver/LC, SMF, 60KM, TX: 1310nm/RX: 1550nm, 0°C ~ 70°C
SFP-GS60-WB	1Gbps BiDi SFP Transceiver/LC, SMF, 60KM, TX: 1550nm/RX: 1310nm, 0°C ~ 70°C
SFP-GS80	1Gbps SFP Transceiver/LC, SMF, 80KM, 1550nm, 0°C ~ 70°C
SFP-GS80-T	1Gbps SFP Transceiver/LC, SMF, 80KM, 1550nm, -40°C ~ 85°C
SFP-GSH2	1Gbps SFP Transceiver/LC, SMF, 120KM, 1550nm, 0°C ~ 70°C
SFP-GSH2-T	1Gbps SFP Transceiver/LC, SMF, 120KM, 1550nm, -40°C ~ 85°C

Copper SFP Transceiver Modules Series

SFP-GC00-SG	SFP to 10/100/1000Base-T(X) copper Module, 0°C ~ 70°C
SFP-GC00-SE	SFP to 1000Base-T copper Module, 0°C ~ 70°C