


IS-RH728 Series

28-port Rack Mount Fast Ethernet Managed Layer 2 Industrial Ethernet Switch with 4x 1G Uplink



The IS-RH728 Series are 28-port Rack Mount Fast Ethernet Managed Layer 2 Industrial Ethernet Switch with 4x 1G Uplink that provide both copper and fiber connectivity according to field needs. These models reduce the response time for timing sensitive applications which may combine all video, voice, and data streams in the traffic flow. The Switches are especially good for those common application that doesn't required complicated software features. The IS-RH728 Series are suitable for all kinds of Industrial applications.

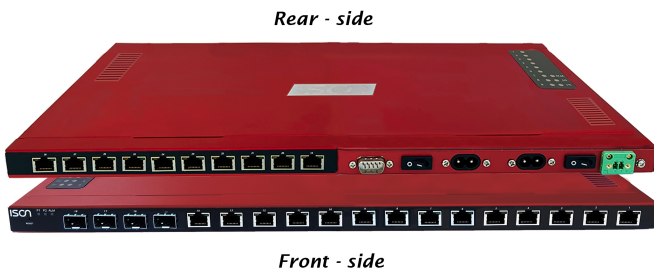

Key features

- ▶ IS-RH728, 24x 10/100Mb Copper ports plus 4x 10/100/1000Mb Base Copper ports
- ▶ IS-RH728-4F, 24x 10/100Mb Copper ports plus 4x 1000Mb Base SFP ports
- ▶ Layer 2 Line-Speed Switching Fabric, non-blocking
- ▶ Network redundancy LACP, Spanning Tree Protocol, STP, RSTP
- ▶ Port-based VLAN, IEEE 802.1Q Tag-based VLAN
- ▶ SNMP v1/v2c, Trap
- ▶ Dual AC Power Input 100/240 VAC, 50Hz ~ 60Hz
- ▶ -40~75°C operating temperature
- ▶ Loop Protection
- ▶ IP 30 Protection
- ▶ 2KV surge immunity on RJ45 Copper port
- ▶ 1.5KV Hi-pot
- ▶ Rugged Fan-less Design
- ▶ Relay Output (1A, 24V, Normal Close)

Specification

Ethernet

Operating Mode	Store and Forward, L2 wire-speed/non-blocking switching engine
MAC addresses	16K
Packet Buffer	4 Mbits
Switching Fabric / Back Plane	12.8 Gbps

RJ45 Copper ports

Speed	10/100 Mbps, 4x 10/100/1000 Mbps(IS-RH728)
MDI/MDIX Auto-crossover	Support straight or cross wired cables
Auto-negotiation/Duplex	10/100 Mbps, 4x 10/100/1000 Mbps(IS-RH728) speed auto-negotiation; Full & Half Duplex
Ethernet Port Protection	1.5KV VRMS 1minute (Hi-pot), 2KV surge immunity on RJ45 Copper ports

Fiber Ports

Port Types supported	100 Base SFP Slot, 4x 1000 Base SFP Slot(IS-RH728-4F)
Fiber port connector	LC/RJ45 connector for fiber ports
Optimal fiber cable	Typical 50 or 62.5/125 μ m for multimode (mm) Typical 8 or 9/125 μ m for single mode (sm)

Protocols & Standards

IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.1D/w, IEEE 802.1Q/p, IEEE 802.1ab, IEEE 802.1X, IEEE 802.3ad LLDP, IPv4/IPv6, SNMP v1/v2c, TFTP, ARP, RARP, Telnet, Syslog, Flow Control, Back Pressure, ICMP, UDP, TCP

Network Redundancy

Spanning Tree Protocol	IEEE 802.1D/1w, STP/RSTP
Port Trunk / LACP	Static Trunk or LACP (Link Aggregation Control Protocol)

Bridge, VLANs, Protocols

Flow Control	IEEE 802.3x (Full Duplex) and Back-Pressure (Half Duplex)
Max VLANs	256
VLAN Types	Port-Based VLAN, IEEE 802.1Q tag-based VLAN
Multicast protocols	IGMP v1, v2, up to 255 multicast groups IGMP snooping, querying
LLDP	IEEE 802.1ab LLDP

Traffic management & QoS

Priority	IEEE 802.1p QoS
Number of queues per port	8
Scheduling schemes	SPQ, WRR

Security

Port Security	IP and MAC-based Access Control/Filter, Auth User / Privilege Level Control
Storm Control	Multicast / Broadcast / Flooding Storm Control / Port Access Control / Limiters

Management

User Management Interfaces	Cisco-Like CLI (Command Line Interface, RS232 Console), Web-based Management SNMP V1, V2c, Trap, Telnet (5 sessions)
Management Security	HTTPs, SSH, Access Management, Loop Protection
Upgrade & Restore	TFTP for Configuration Import / Export TFTP for Firmware Upgrade
Diagnostic	Syslog, Level Info / Warning / Error Port Mirror, Per VLAN mirroring, CPU Load Monitor, Traffic Counter ICMP Ping
DHCP	Client Mode, Server Mode, Relay Mode, Snooping
SNTP	YES
System Status	Device info/status; Ethernet port status
Green Ethernet	Port Power Savings

Power

Power Input	Redundant AC Power Input, IEC Connector
Input Voltage Range	100/240 VAC, 50Hz~60Hz
Reverse power protection	YES
Transient protection	> 15, 000 Watts peak
Power Consumption	12.5Watt

Indicators

Power status indication	Power Input status
Ethernet port indication	Link & speed

Environmental and Compliances

Operating Temperature	-40~75°C (Cold startup at -40°C)
Storage Temperature	-40~85°C
Humidity	5~95% (Non-Condensing)
Vibration, shock, free fall	IEC-60068-2-6, -27, -32
Certification Compliance	CE, FCC
Electrical safety	CE
EMC	FCC Part 15, CISPR 22 (EN55022) Class A IEC-61000-4-2, -3, -4, -5, -6 (Level 3)
RoHS & WEEE	RoHS (Pb free) and WEEE Compliant
MTBF	> 220,000 hrs

Mechanical

Protection	IP30
Dimension	TBD
Weight	TBD
Installation	Rack Mount, Wall mount (optional)
Relay Output	1A, 24V, Normal Close

Dimension Diagram (TBD)

Ordering Information

Available Models	Description	10/100Mb TX	10/100/1000Mb TX	100Mb FX	1000Mb FX
IS-RH728	28-port Rack Mount Fast Ethernet Managed Layer 2 Industrial Ethernet Switch with 4x 1G Up-link, -40~75°C	24	4	0	0
IS-RH728-4F	28-port Rack Mount Fast Ethernet Managed Layer 2 Industrial Ethernet Switch with 4x 1G Up-link, -40~75°C	24	0	0	4

Accessories (Optional)

1. SFP Modules
2. Wall Mount kit

Package Checklist

- IS-RH728 Switch
- Quick Installation Guide (Printed)
- RJ45 / SFP Cap / Rack Mount kit