

RugCon : RVP-Slim

RVP-T1/X1

Ultra-Slim Wide Temperature Fanless Rugged Edge Computer

Wide DC INPUT 6V~48V

Equipped with the latest Intel® 12th/13th generation Core i processor (U_15W), 2 network ports / 8 USB / 3 Display / 2 COM / Dual M.2 SSD / 5G / WIFI and vehicle ignition power control / remote power control

Fit Anywhere and Everywhere

Ultra Slim : 203 mm x 125 mm x 45 mm

SPECIFICATION



RVP-X1

RVP-T1

Features

- ✓ Intel® 13th/ 12th Gen Core™ i7/i5/i3 (15W)
- ✓ 2x LAN (RJ45 or M12 connectors)
- ✓ 3x Displays (2x HDMI, 1x DP)
- ✓ 1x RS232/422/485, 1x RS232
- ✓ 8x USB (Support 6x USB3.2 GEN1)
- ✓ 1x Mic In/Line Out
- ✓ 2x M.2 2242 M key (SATA III SSD) , support Raid 0/1
- ✓ 1x M.2 2242/3052 B key with SIM slot, support 4G/5G
- ✓ 1x Full Size Mini-PCle with SIM slot, support 4G/5G
- ✓ 1x M.2 Key E Type 2230 for WIFI/BT/GPS
- ✓ 6~48V Wide DC In Voltage Input,
- ✓ Ignition Power Control
- ✓ Remote Control

Product Name	RugCon-RVP-T1 / RVP-X1 (M12 LAN)
Generation	Intel® 13th/ 12th-Gen Core™ i7/i5/i3 (U_15W)
Memory	Max. Capacity : 64GB DDR5 with 2x SO-DIMM
Display	3x Display 1x Display Port, 4096*2304@60Hz 2x HDMI , 4096*2160@30Hz
LAN	1x 2.5 GbE , 1x GbE , M12 A-coded connector for LAN Ports (RVP- X1)
CAN	N//A
COM	1x RS232/422/485, 1x RS232
USB	8x USB (6x USB3.2 GEN1x1 5Gbps, 2x USB 2.0)
Audio	1x 3.5mm jack for Mic-In and Line-out
DIO	N//A
Storage	2x M.2 2242 M key (SATA III SSD) , Support Raid 0/1 , (1x M.2 2242 share with M.2 3052)
Internal Expansion	1x M.2 2242/3052 M-B key with SIM slot, support 4G/5G 1x Full Size Mini-PCle with SIM slot, support 4G/5G 1x M.2 Key E Type 2230 for WIFI/BT/GPS
Mechanical	Dimension : 200(W) x 125(D) x45(H) mm , Weight : 1.1 Kg , Mounting : Wall Mount
Temperature	Operating :Standard : -40°C to 70°C (According to TDP) Storage Temperature : -40°C to 85°C
Humidity	Operating : 0~95%(non-condensing) Storage : 10~90%
Power	1x 3-pin pluggable terminal block for 6-48V DC Input 200V/1ms Surge Protection, Reverse-Voltage, Over-Voltage, Under-Voltage, Over-Current Protection 1x Power Button 1x 4-pin pluggable terminal block for Ignition/Remote
Vibration / Shock	Vibration test according to MIL-STD-810H, Method 514.8, Category 4 Shock test according to MIL-STD-810H, Method 516.8, Procedure I
EMC	CE/FCC Class A , according to EN 55032 & EN 55035 , E-Mark / EN50155 / EN45545-2 by request

Product Introduction

ENBIK RugCon-RVP-T1/X1 is an **ultra-mini ultra-thin size** rugged edge computer, only 203 x 125 x 45 mm, which is very suitable for space-limited installation and deployment, and perfectly combining a sturdy waterproof shell, high-performance low power intel® 13th/ 12th core™ i7/i5/i3 processor and precise I/O design. **RVP-T1/X1** provides a wide range of I/O ports, including 2 network ports, 1 RS232/422/485, 1 RS232, 8 USB, 2 HDMI, 1 DP and multiple M.2 internal expansion slots for 5G/4G/WIFI/GPS. **RVP-T1/X1** also has 2x M.2 2242 SATA III, which can install two SSDs at the same time.

ENBIK RVP-T1/X1 supports MXM expansion interface, which can flexibly integrate **ENBIK's MXM GPU AI computing box** to improve edge AI deep learning and reasoning capabilities. While driving high-performance computing with low-power consumption configuration, it helps to reduce power consumption. With high computing power, high stability and high reliability, it helps customers achieve deployment-intensive artificial intelligence reasoning applications and maintain high cost-effectiveness.

Product Application

ENBIK RugCon-RVP-T1/X1 is suitable for edge computing, IoT, machine vision, AGV/AMR, In-Vehicle systems, rail transit, robot control, drone and automation control, as well as various harsh and extreme edge environments with limited installation space and limited power supply.

RugCon RVP-X1
M12 A-code Connectors for LAN Ports

Back

Intel 12th CPU Support

It can be equipped with 15W Intel® 14th/13/12th generation Core™ low-power i7/i5/i3 processor.

ENBIK

RugCon RVP-T1

Super Small : 203 x 125 x 54 mm

2 x M.2 2242 M key (SATA III SSD)

M.2 Expansion for 5G/4G/LTE/WIFI / GPS

1x Full Size Mini-PCIe(PCle, USB2) with SIM slot
1x M.2 2242/3052 B key(SATA III,PCIE) with SIM slot
1x M.2 Key E Type 2230 (PCle, USB2)

Ignition Control / Remote Control

2x RJ45 LAN
1x 2.5 GbE, 1x GbE

3x Display
1x DP, 2x HDMI

1x USB3.2
USB3.2 GEN1x1 5Gbps

2x COM support
1x RS232/422/485 / 1x RS232

1x USB3.2
USB3.2 GEN1x1 5Gbps



6~48V DC INPUT / 180W

200V/1ms Surge Protection,
Reverse-Voltage Protection
Over-Voltage Protection
Under-Voltage Protection
Over-Current Protection

6 xUSB(4x USB3.2 GEN1x1 5Gbps, 2x USB2.0)

Dimension :

Compact Slim : 203 mm x 125 mm x 45 mm

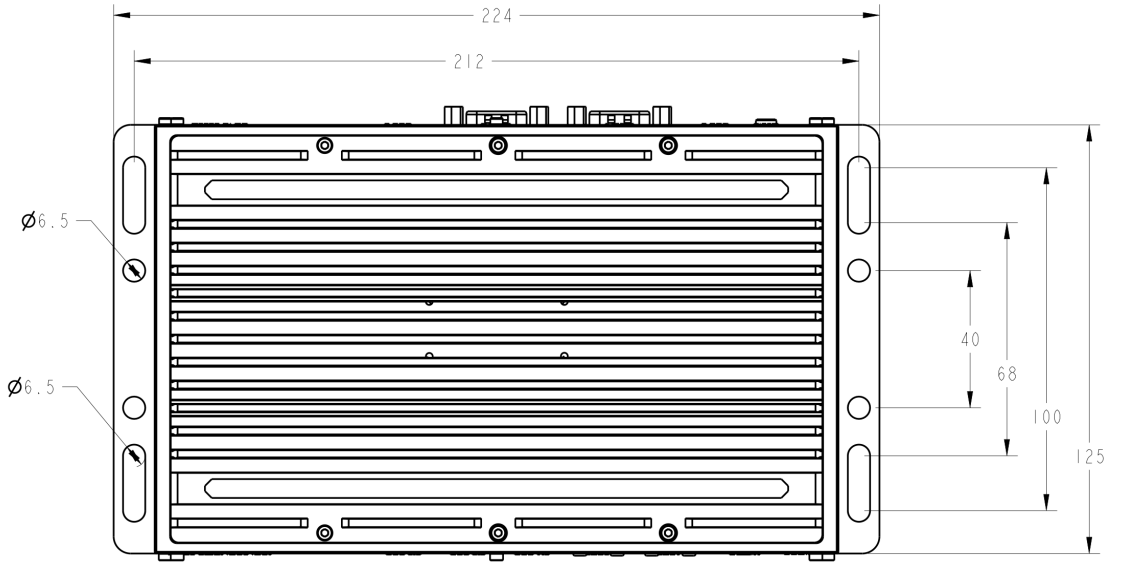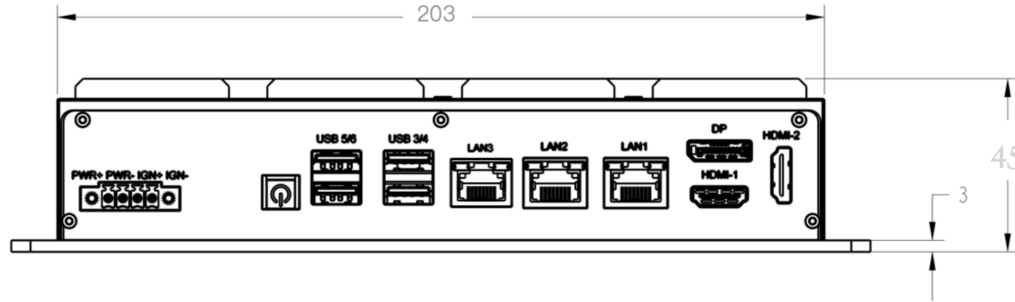

CPU Support :

Intel 12th CPU Support List

12th Gen Intel® Core™ mobile processors (formerly Alder Lake-P) , Commercial

CPU Module	Description
i5-1235U	Intel® Core™ i5-1235U processor with 2 P-cores and 8 E-cores up to 4.4GHz 12MB Intel® Smart Cache Intel® Iris® Xe Graphics architecture with 80 EUs Intel® code name Alder Lake-P (U-Series,15W)
i3-1215U	Intel® Core™ i3-1215U processor with 2 P-cores and 4 E-cores up to 4.4GHz 10MB Intel® Smart Cache Intel® UHD Graphics 64EU Intel® code name Alder Lake-P (U-Series,15W)

Intel 13th CPU Support List

13th Gen Intel® Core™ mobile processors (formerly Raptor Lake-P) , Commercial

CPU Module	Description
i5-1335U	Intel® Core™ i5-1335U processor with 2 P-cores and 8 E-cores up to 4.6GHz 12MB Intel® Smart Cache Intel® Iris® Xe Graphics architecture with 80 EUs Intel® code name Raptor Lake-P (U-Series,15W)
i3-1315U	Intel® Core™ i3-1315U processor with 2 P-cores and 4 E-cores up to 4.5GHz 10MB Intel® Smart Cache Intel® UHD Graphics 64EU Intel® code name Raptor Lake-P (U-Series,15W)

Note : Embedded or other Processors also be supported , please contact our sales channel .