

DIN RAIL POWER SUPPLY, 15 W, 24 V




Technical data

Input voltage	90 – 264 VAC
Input frequency	50/60 Hz
Input current	0.5 A
Output voltage	24 VDC
Output current	0.63 A
Input voltage absolute maximum	85 – 264 VAC
Input frequency absolute maximum	47 – 63 Hz
Inrush current	45 A
Output voltage absolute maximum	21.6 – 29 VDC
Short circuit protection	✓
HIPOT (dielectric withstand test) – Primary to Secondary	3 kVAC
Input connector	Screw terminal
Output connector	Screw terminal
Weight	78 g

Safety	EN 62368-1:2014+A11:2017, BS EN 62368-1:2014+A11:2017
EMC	EN 55032:2015+A11:2020+A1:2020, EN 55035:2017+A11:2020, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, BS EN 55032:2015+A11:2020, BS EN 55035:2017+A11:2020, BS EN IEC 61000-3-2:2019+A1:2021, BS EN 61000-3-3:2013+A1:2019

Spatial measurements

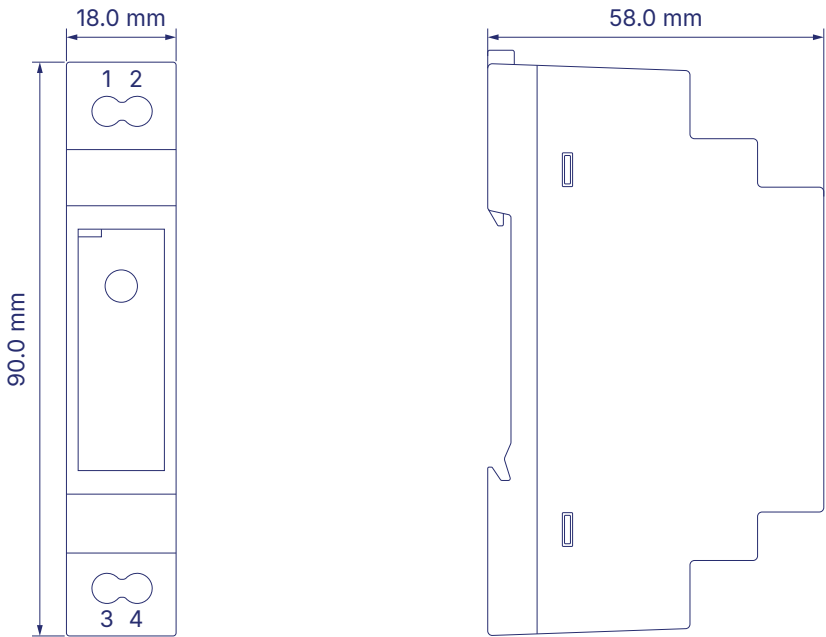

Input	
No.	Description
1	+V
2	-V

Output	
No.	Description
3	AC/N
4	AC/L