CONSOLE CABLE 1.8M



PARAMETER	RATED VALUE
Operating temperature range	-20 °C - 80 °C
Signal voltage levels at the RJ45 connector	RS232 standard levels
Information about ESD immunity	6 kV
Maximum supported baud rate	256000 Bd
Conductor	24 AWG
Length	1.8 m
Connectors	8P8C(RJ45) plug; USB 2.0 A Male
IC	FT232RL+ZT213
Certificates	Regulation (EC) No 1907/2006 (REACH) Directive 2011/65/EU and amendment (EU) 2015/863 (RoHS 3)

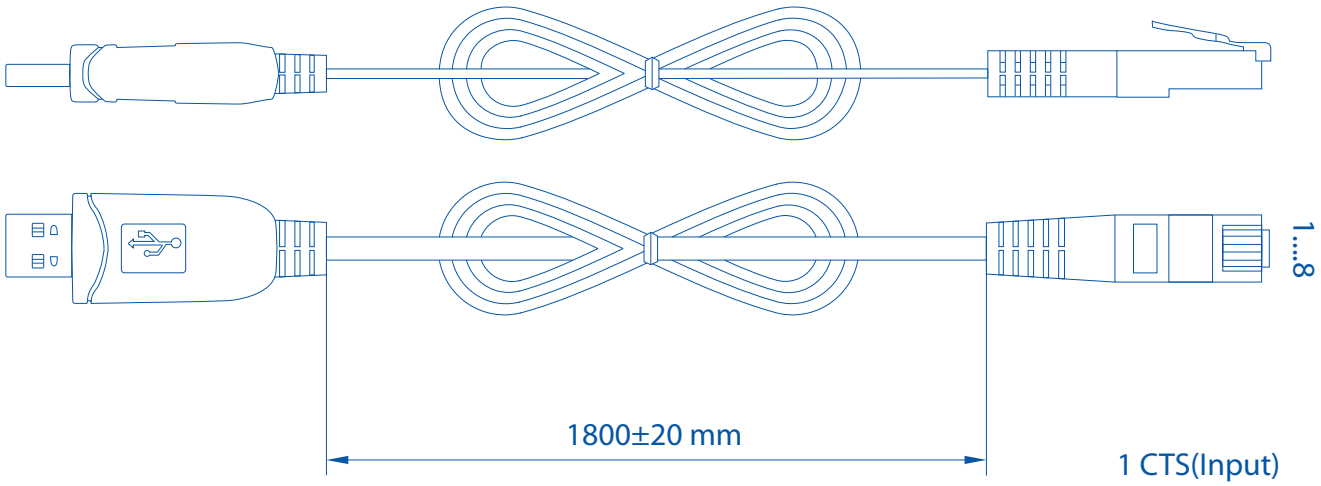

1 CTS(Input)
2 DSR(Input)
3 RXD(Input)
4 GND
5 DCD(Input)
6 TXD(Output)
7 DTR(Output)
8 RTS(Output)

Copyright © 2021, TELTONIKA NETWORKS. Specifications and information given in this document are subject to change by TELTONIKA NETWORKS without prior notice.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Teltonika:
PR2UR18M